

Automotive Grey Jacketed Wire Rated -30°C to 105°C 60V

Heavy duty PVC jacket with colour coded conductors. Recommended for trucks, buses, tractors, light duty boats and general service. Conductors meet SAE J1128 specifications.



2 Conductor 
Black - White

Gauge	O.D.	Stranding	50'	100'	500'	1000'
10/2 AWG	.257 x .434	19/23	8145-B	8145-C		8145-M
12/2 AWG	.225 x .370	19/25	8149-B	8149-C	8149-28	8149-M
14/2 AWG	.200 x .320	19/27	8148-B	8148-C	8148-28	8148-M
16/2 AWG	.185 x .290	19/29	8147-B	8147-C		8147-M
18/2 AWG	.178 x .276	16/30	8146-B	8146-C		8146-M



3 Conductor 
Black - Green - White



4 Conductor 
Black - Green - Red - White

Gauge	O.D.	Stranding	50'	100'	1000'	Gauge	O.D.	Stranding	50'	100'	1000'
12/3 AWG	.225 x .515	19/25	8130-B	8130-C	8130-29	12/4 AWG	.225 x .660	19/25	8131-B	8131-C	8131-29
14/3 AWG	.200 x .440	19/27	8129-B	8129-C	8129-29	14/4 AWG	.200 x .560	19/27	8128-B	8128-C	8128-29
16/3 AWG	.185 x .395	19/29	8137-B	8137-C	8137-29	16/4 AWG	.185 x .500	19/29	8136-25	8136-26	8136-29

Automotive Black Jacketed Wire Rated -30°C to 80°C 60V

PVC jacket with colour coded conductors. Conductors meet SAE J1128 specifications.




2 Conductor 
Black - White

Gauge	O.D.	Stranding	100'	500'
12/2 AWG	.225 x .370	19/25	8079-26	8079-28
14/2 AWG	.200 x .320	19/27	8078-26	8078-28
16/2 AWG	.185 x .290	19/29	8077-26	

Deep Freeze Trailer Cable Rated -65°C to 80°C (60V)

PVC insulated jacket that is both chemical and abrasion resistant. Conductor colour-coded for circuit identification. Conductors meet SAE J1128 specs.

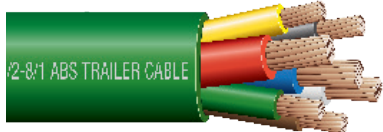

ABS Trailer Cable 

Ensures sufficient power to anti-lock braking systems (ABS). Consists of one 8 gauge ground wire, two 10 gauge stop-lamp & constant-power circuit wires, and four 12 gauge circuit wires for powering other lamps. All copper strand core. Meets SAE J1128 specifications for ABS systems.

Gauge	Colours	Stranding	O.D.	50'	100'	250'
12/4 - 10/2 - 8/1	Red/Wht/Blk/Brn/Grn/Yel/Blu	65/30 - 105/30 - 168/30	.690	8157-B	8157-C	8157-RL



Trailer Cable 60V 

Gauge	Colours	Stranding	O.D.	50'	100'	250'	500'	1000'
12/6 - 10/1	Red/Wht/Blk/Brn/Grn/Yel/Blu	19/25 - 19/23	.600	8150-B	8150-C	8150-27		
14/6 - 12/1	Red/Grn/Brn/Blk/Yel/Blu/Wht	19/27 - 19/25	.520	8153-25	8153-26	8153-27		
14/7	Red/Wht/Brn/Grn/Yel/Blu/Blk	19/27	.500	8156-B	8156-C	8156-RL		8156-M
14/6	Red/Wht/Blk/Brn/Grn/Yel	19/27	.500	8151-B	8151-C	8151-RL		
14/4	Red/Wht/Blk/Brn	19/27	.410	8152-B	8152-C	8152-RL		8152-M
14/4	Brn/Grn/Wht/Yel	19/27	.410	8154-25	8154-26	8154-27		8154-29
14/4	Brn/Grn/Red/Yel	19/27	.410	8160-25	8160-26	8160-27	8160-28	8160-29
14/4	Wht/Grn/Brn/Red	19/27	.410	8170-25	8170-26	8170-27		
14/3	Red/Wht/Blk	19/27	.390	8168-25	8168-26	8168-27		
14/2	Grn/Yel	19/27	.380	8161-25	8161-26	8161-27		
14/2	Blk/Wht	19/27	.380	8171-25	8171-26	8171-27		
16/6	Red/Wht/Blk/Brn/Grn/Yel	19/29	.425	8155-B	8155-C	8155-27		
16/4	Red/Yel/Grn/Brn	19/29	.360	8159-25	8159-26	8159-27		
RV Trailer Cable								
14/4 - 10/2 - 12/1	Red/Wht/Blk/Brn/Grn/Yel/Blu	19/27 - 19/25 - 19/23	.560	8158-B	8158-C	8158-RL		

