



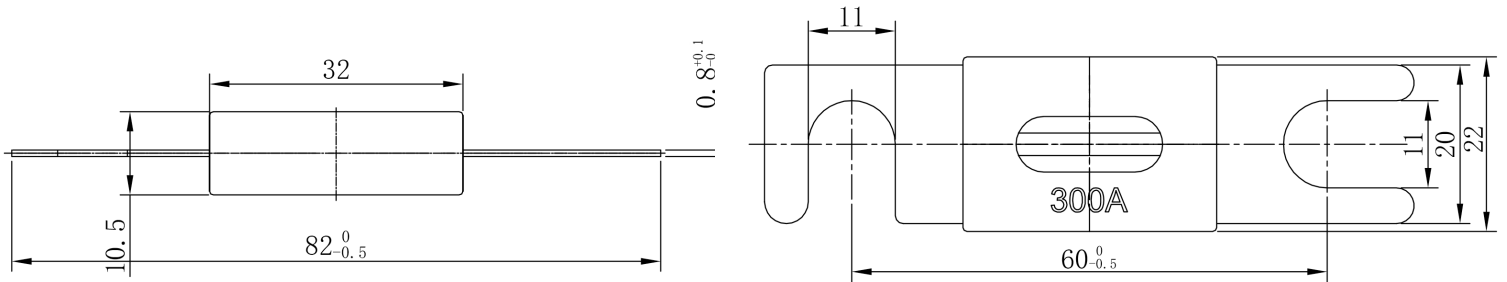

# PICO®

## 9814-9819 Specifications Sheet

### Outline Drawing

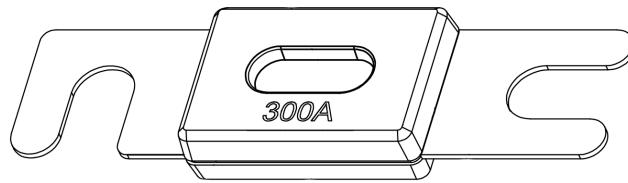

Scale: mm

Time Current Characteristics			AMP	PT. #	MOUNTING TORQUE
Test Current	Opening Time		250A	9814	12~13N.m
	Min	Max	300A	9815	13~14N.m
160%	60s	---	325A	9816	
220%	---	60s	400A	9817	13~15N.m
250%	0.8s	10s	500A	9819	15~17N.m
400%	0.2s	2s			

### Notes

- Metal Element: Copper Alloy with gold plating
- Body: Ceramic
- Voltage Rating: 80V DC
- Type: Medium Time Lag
- Complies with DIN 43560/1
- Unless otherwise specified tolerance is  $\pm 0.4$  mm.

