



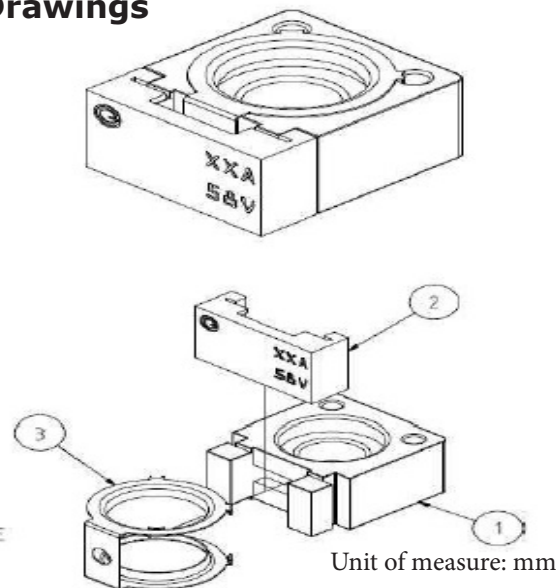

PICO®

Battery Terminal Fuse Specifications Sheet

Outline Drawings

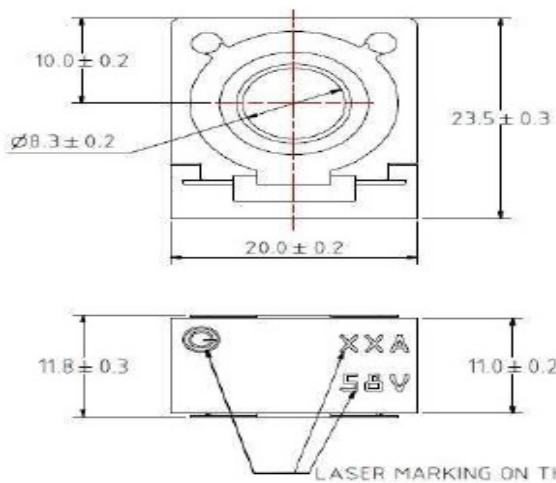

Time-Current Characteristics

% of Rating	Opening Time Min/Max.(s)
100	360,000 s / -
135	- / 3,600 s
150	1 s / 600 s
200	0.200 s / 60 s
300	0.050 s / 1.5 s
400	0.020 s / 0.50 s
600	- / 0.20 s

*The fuse characteristic may change depending on the conditions of use.

Description

Part #	Amp	Voltage	Part #	Amp	Voltage
9875-11	30	58 VDC	9882-11	125	58 VDC
9876-11	40	58 VDC	9883-11	150	58 VDC
9877-11	50	58 VDC	9884-11	175	58 VDC
9878-11	60	58 VDC	9885-11	200	58 VDC
9879-11	75	58 VDC	9886-11	225	58 VDC
9880-11	80	58 VDC	9887-11	250	58 VDC
9881-11	100	58 VDC			

*Voltage drop: apply 100% of the rated current.

General Specifications

Insulating Body: Ceramic
Cover: UL 94-V0, heat resistant thermoplastic
Interrupting Rating: 2,000A @ 58 VDC
Complies with: ISO 8820-6, DIN 72581-5, UL 248 Special Purpose Fuses

