





PICO®

9905-9930 Specifications Sheet

Outline Drawings

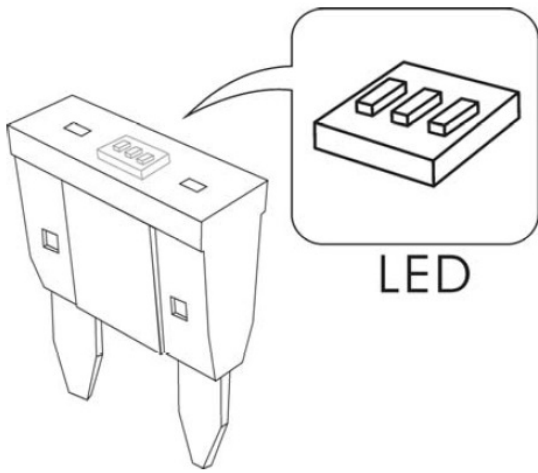

a	Max: 4.0
b	Max: 11.2
c	Max: 9.0
d	7.0 ~ 8.0
e	10.6 ~ 11.2
f	2.6 ~ 3.0
g	0.78 ~ 0.88
h	4.95 ~ 5.45

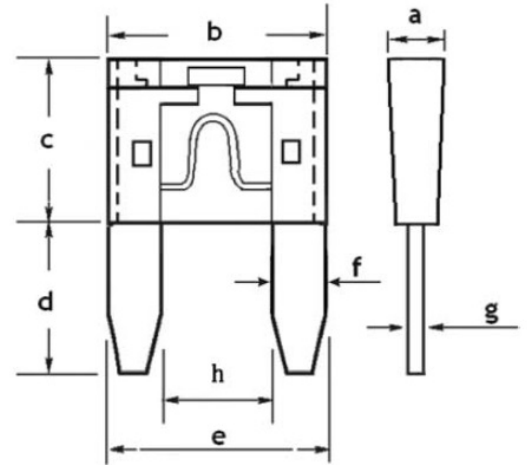


Unit of measure: mm

Time Current Characteristics

% of Amperage Rating	Current Rating	Operating Time % of Amperage Rating	
		Min.	Max
110%	2 ~ 40 Amp	100 Hours	---
135%	2 ~ 40 Amp	0.75 Sec.	1,800 Sec.
200%	2 ~ 40 Amp	0.15 Sec.	5 Sec.
350%	2 ~ 40 Amp	0.08 Sec.	0.25 Sec.

Time Current Chart

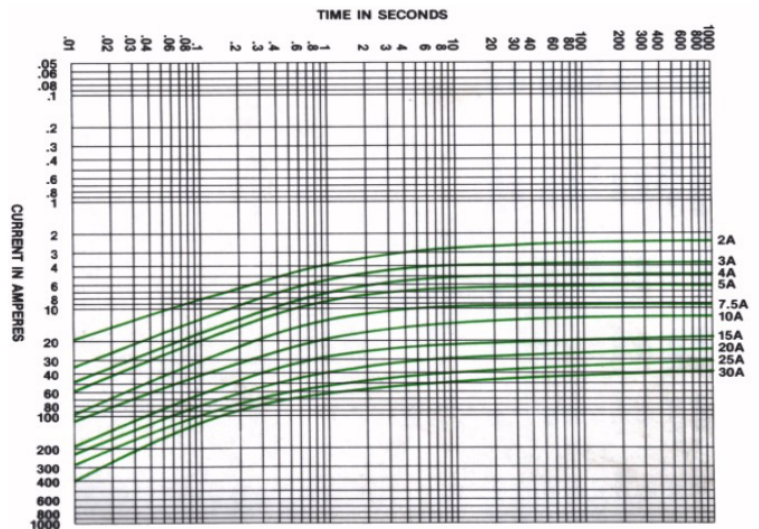

Description

Part #	Amp	Colour	Normal Cold Resistance (Ohms)
9905	5	Tan	0.018
9907	7.5	Brown	0.011
9910	10	Red	0.0077
9915	15	Blue	0.0048
9920	20	Yellow	0.0033
9925	25	Clear	0.0025
9930	30	Green	0.0018

General Specifications

- Fuse Type: MIN with LED Indicator
- Standard: UL275A, ISO8820-3, SAE J 2077
- Voltage Rating: 32V DC
- Fuses are colour-coded for easy amperage identification
- LED lifetime: 1000 hours
- Fusible Element: Zinc Alloy
- Body Material: Plastic