





PICO®

9959-9968 Specifications Sheet

Outline Drawings

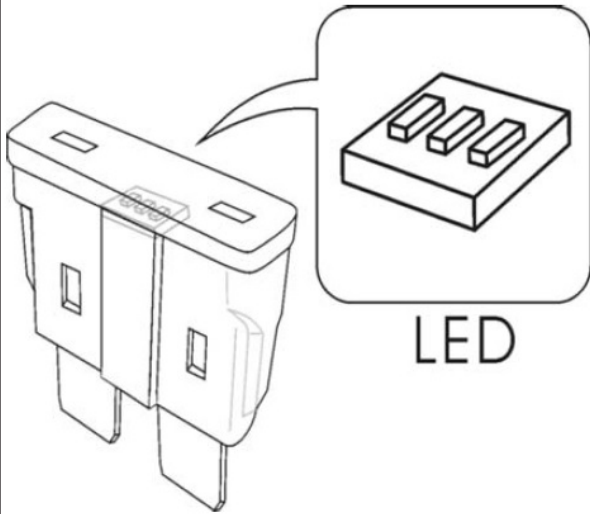

a	18.87 ~ 19.30
b	4.99 ~ 5.25
c	Max: 12.54
d	6.17 ~ 6.67
e	18.41 ~ 19.05
f	3.59 ~ 3.80
g	3.90 ~ 4.13
h	14.35 ~ 14.61
j	0.61 ~ 0.69

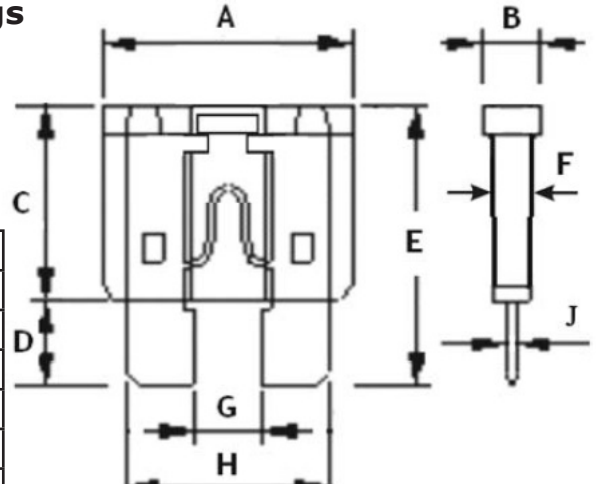


Unit of measure: mm

Time Current Characteristics

% of Amperage Rating	Current Rating	Operating Time % of Amperage Rating	
		Min.	Max
110%	2 ~ 40 Amp	100 Hours	110%
135%	2 ~ 40 Amp	0.75 Sec.	135%
200%	2 ~ 40 Amp	0.15 Sec.	200%
350%	2 ~ 40 Amp	0.08 Sec.	350%

Time Current Chart

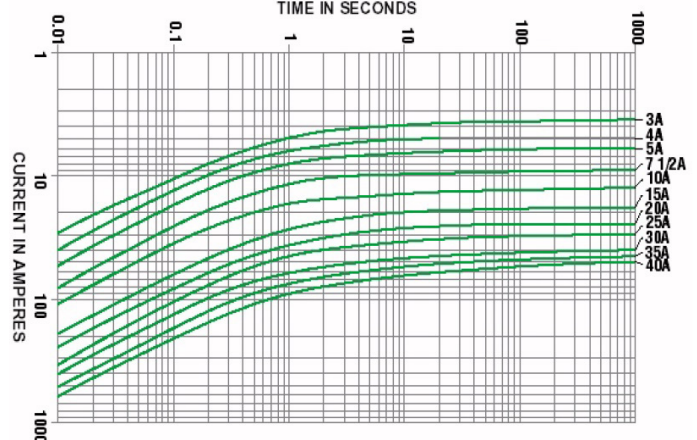

Description

Part #	Amp	Colour	Normal Cold Resistance (Ohms)
9959	2	Grey	0.056
9960	3	Violet	0.034
9961	4	Pink	0.024
9962	5	Tan	0.018
9963	7.5	Brown	0.011
9964	10	Red	0.0077
9965	15	Blue	0.0045
9966	20	Yellow	0.0032
9967	25	Clear	0.0023
9968	30	Green	0.0018

General Specifications

- Fuse Type: Standard with LED Indicator
- Standard: UL 275A, ISO8820-3, SAE J 1284
- Voltage Rating: 32V DC
- Fuses are colour-coded for easy amperage identification
- LED lifetime: 1000 hours
- Fusible Element: Zinc Alloy
- Body Material: Plastic