





# PICO<sup>®</sup>

## 9990-9997 Specifications Sheet

### Outline Drawings

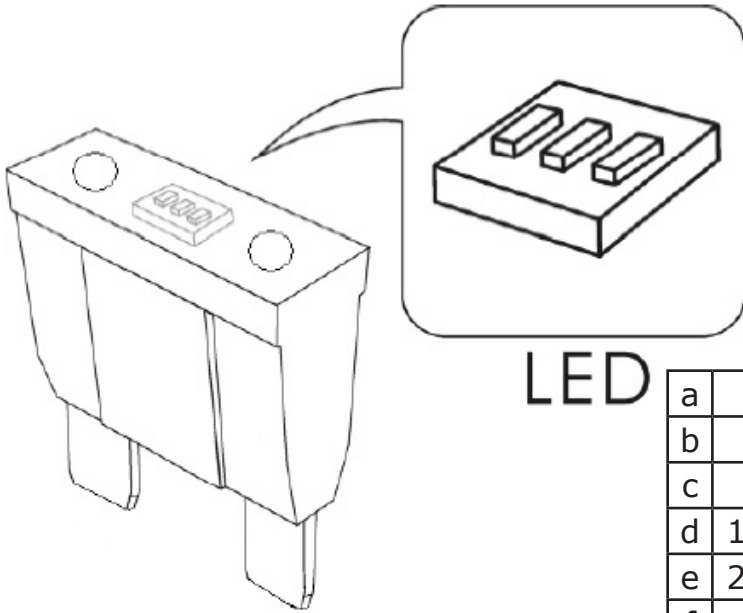

LED

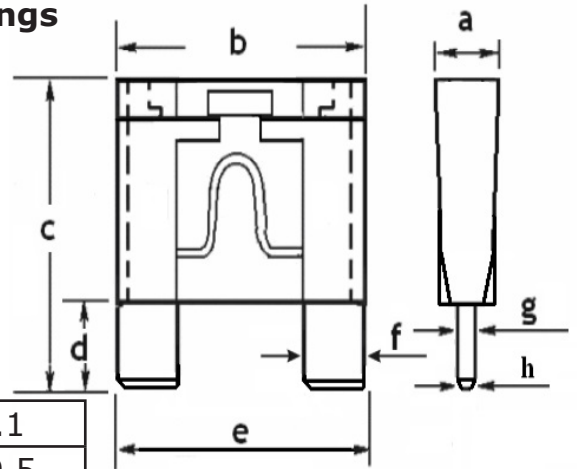

a	Max: 9.1
b	Max: 29.5
c	Max: 35.00
d	12.30 ~ 13.10
e	29.00 ~ 29.40
f	7.80 ~ 8.20
g	0.78 ~ 0.86
h	Max: 0.6

Unit of measure: mm

### Time Current Characteristics

% of Amperage Rating	Current Rating	Operating Time	
		Max	Max
110%	20 ~ 100 Amp	100 Hours	---
135%	20 ~ 100 Amp	0.6 Sec.	1,800 Sec.
200%	20 ~ 100 Amp	0.2 Sec.	60 Sec.
350%	20 ~ 100 Amp	0.02 Sec.	7 Sec.

### Description

Part #	Amp	Colour	Normal Cold Resistance (Ohms)
9990	20	Yellow	0.0027
9991	30	Green	0.0013
9992	40	Orange	0.0011
9993	50	Red	0.0010
9994	60	Blue	0.0009
9995	70	Brown	0.0008
9996	80	Natural	0.00077
9997	100	Purple	0.00075

### General Specifications

- Fuse Type: MAX with LED Indicator
- Standard: ISO8820-3, SAE J 1888
- Voltage Rating: 32V DC
- Fuses are colour-coded for easy amperage identification
- LED lifetime: 1000 hours
- Fusible Element: Zinc Alloy
- Body Material: Plastic