






PICO®



10205-10230 Specifications Sheet



Outline Drawings

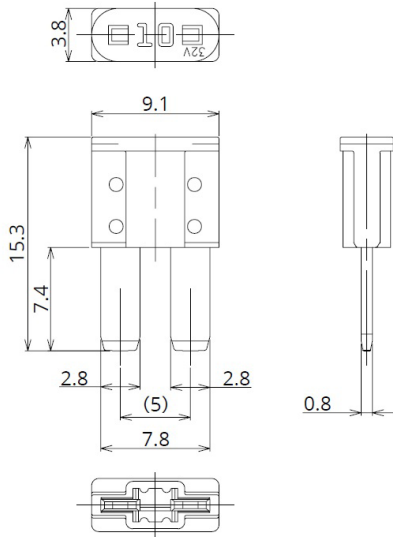

General Specifications

Voltage Rating: 32V DC
Breaking Capacity: 1000A
Operating Temperature: -40°C to 120°C
Plating: Ag Plating




Time-Current Characteristics

Test Current	Operating Time	
	Min.	Max.
110%	100hrs	---
135%	0.75 s	120 s
160%	0.25 s	50 s
200%	0.15 s	5 s
350%	0.04 s	0.5 s
600%	0.02 s	0.1 s

*The fuse characteristic may change depending on the conditions of use.

Time-Current Characteristics Chart

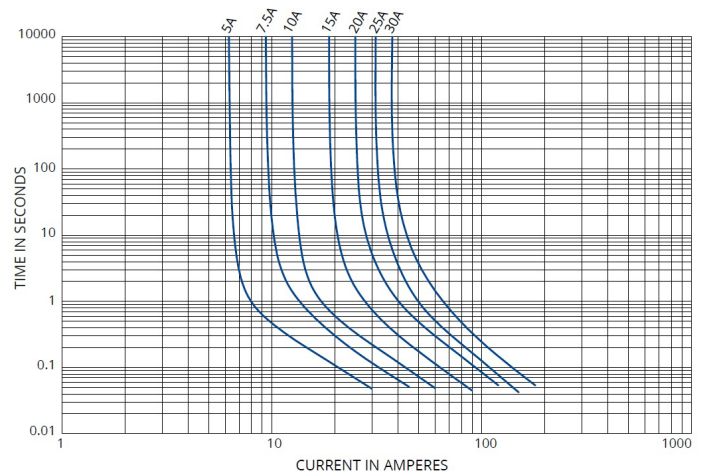

Description

Part #	Amp	Colour	Resistance Value	Voltage Drop	Part #	Amp	Colour	Resistance Value	Voltage Drop
10205	5	Tan	17.3 mΩ	117 mV	10220	20	Yellow	3.65 mΩ	95 mV
10207	7.5	Brown	10.7 mΩ	109 mV	10225	25	Clear	2.75 mΩ	88 mV
10210	10	Red	7.85 mΩ	104 mV	10230	30	Green	2.18 mΩ	82 mV
10215	15	Blue	5.05 mΩ	100 mV					

*Voltage drop: apply 100% of the rated current.