






PICO®

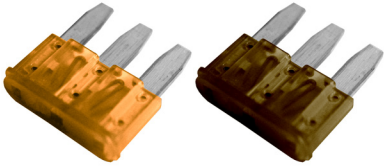

10305-10315 Specifications Sheet

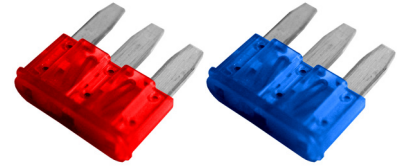

Outline Drawings

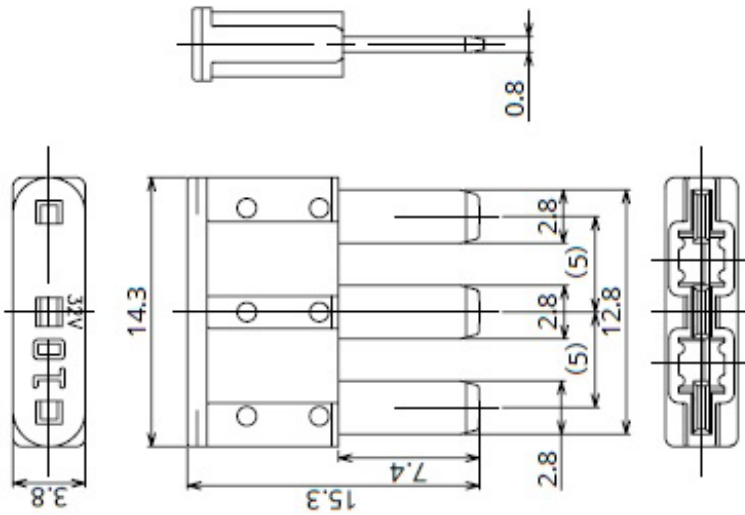

General Specifications

Rated Voltage: 32V DC
 Breaking Capacity: 1000A
 Recommended Operating Temp: -40°C to 120°C
 Plating: Ag Plating




Time-Current Characteristics

Test Current	Opening Time	
	Min.	Max.
110%	100hrs	---
135%	0.75 s	120 s
160%	0.25 s	50 s
200%	0.15 s	5 s
350%	0.04 s	0.5 s
600%	0.02 s	0.1 s

*The fuse characteristic may change depending on the conditions of use.

Time-Current Characteristics Chart

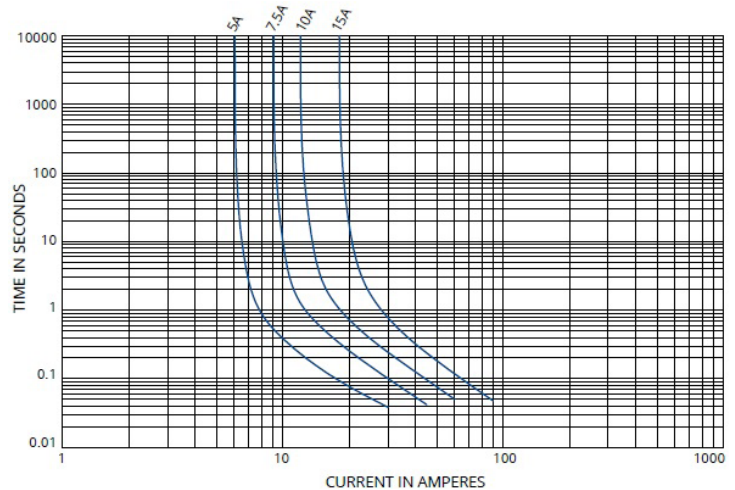

Description

Part #	Ampere	Colour	Resistance Value	Voltage Drop
10305	5	Tan	16.9 mΩ	110 mV
10307	7.5	Brown	10.6 mΩ	104 mV
10310	10	Red	7.94 mΩ	104 mV
10315	15	Blue	5.07 mΩ	97 mV

*Voltage drop: apply 100% of the rated current.