




1903, 1904, 1905, 1906, 1908, 1909, 1913 Specifications Sheet

Outline Drawing

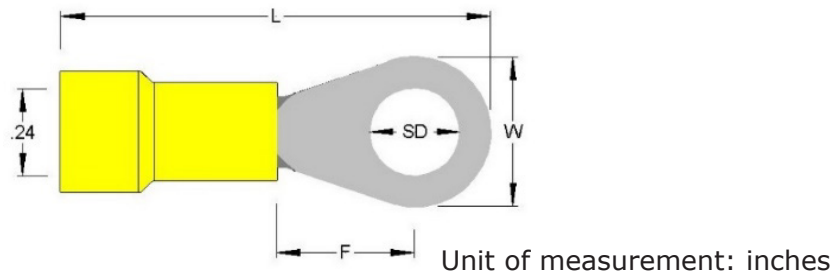

Notes

UL/ CSA Requirements:

- Temperature Rating: 75°C Max. 600V
- One Crimp Required
- Solid or Stranded Wire
- Strip Length 9/32" (7.1mm)
- Crimp tool: PICO no. 401/403 Crimp Tool handles with 415 Crimp Die
- 110 Copper Alloy .038 thickness,
- Electro-Tin Plated .00025"-.0004"
- Terminal I.D. - .141/.144

Agency & Compliance:

- UL listed, investigated to UL 486 A-B
- CSA 22.2 No. 65-03
- RoHS 3 2015/863/EU

Specifications

12-10 AWG

Part #	Stud Size	Barrel Length	Length	W	Stud Diameter	F
1903	6	.250	1.020	.342	.143/.147	.297
1904	8	.250	1.020	.342	.168/.171	.297
1905	10	.250	1.020	.342	.194/.197	.297
1906	1/4	.250	1.30	.558	.257/.261	.469
1908	5/16	.250	1.30	.558	.327/.323	.469
1909	3/8	.250	1.30	.558	.400/.394	.469
1913	1/2	.250	1.50	.690	.525/.530	.615

WARNING! Incorrect installation of electrical wire and terminals can be hazardous. It can cause an injury or property damage. Refer to National Electrical Code or take advice from the local building inspector for safe wiring practices. To determine the correct wire and terminal size to use and to ensure it will be safely installed, seek guidance from a licensed electrical contractor or engineer.

These are recommendations of procedures by PICO. Use the product after determining it's suitability for the application. PICO is not responsible for any risks and liability for use. Statements related to any PICO products which are not present in PICO of Canada Ltd.'s recent publications have no validation unless they are authorized by a PICO representative in writing.

