




PICO[®]


3442, 3448 Specifications Sheet

Outline Drawing

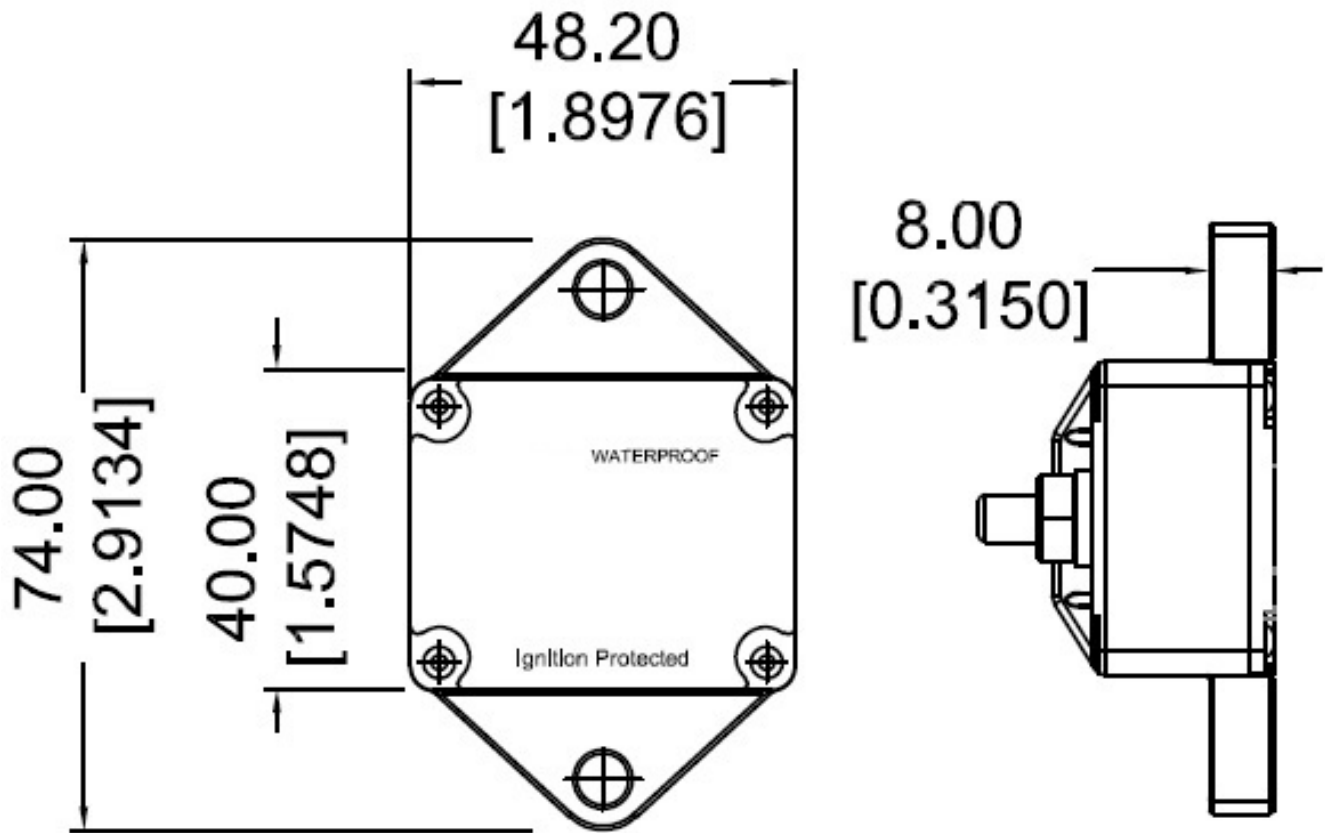


Unit: mm

TEMPERATURE DERATING CURVES

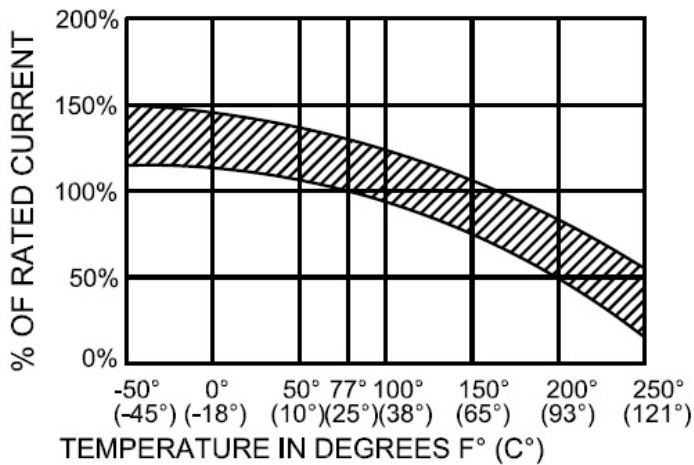

TIME VS. PERCENT OF RATED CURRENT

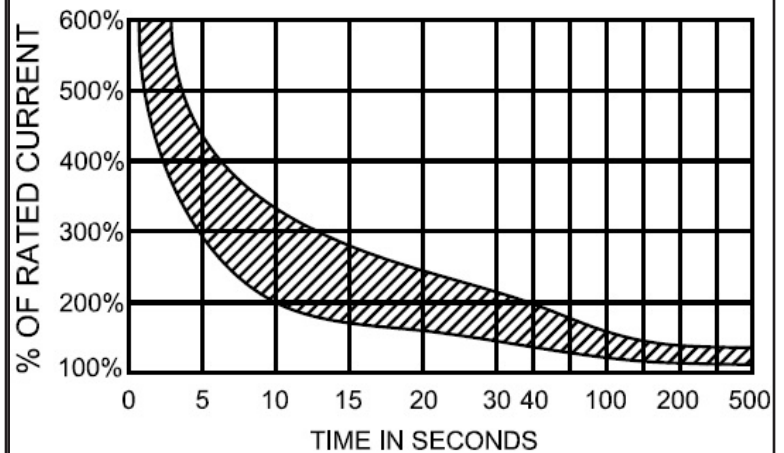



PICO®

3306 Specifications Sheet



Endurance & Interrupt Capacity

| | Endurance | | | Interrupt |
|-------|-----------|----|-------|-------------|
| | ≤50A | 2x | >100 | |
| 96VDC | ≤60A | 2X | >50 | 1KA-96VDC |
| | ≤150A | 2X | >100 | |
| 72VDC | ≤100A | 4X | >100 | 2KA-72VDC |
| 48VDC | ≤150A | 2X | >100 | 3KA-32VDC |
| | ≥200A | 2X | >100 | 1.5KA-28VDC |
| 14VDC | | 4X | >200 | 2.5KA-14VDC |
| | ≤150A | 4X | >6000 | 5KA-16VDC |

Notes

- Amperage: 135
- Housing Material: UL 94V0 rated thermal plastic.
- IP 67 Rated
- Operating Temperature Range: -32°C to 82°C
- Storing Temperature: -34°C to 149°C
- Stud size: 1/4"
- Torque rating: 150in-lbs (17Nm)
- Meets: SAE J1428, J1625, J553, J1171, UL 1500