

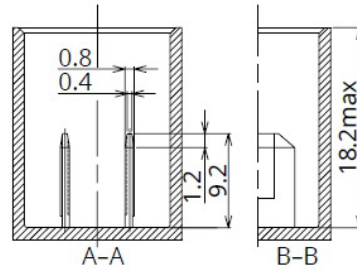





# PICO®

## 9590-9594 Specifications Sheet

### Outline Drawings

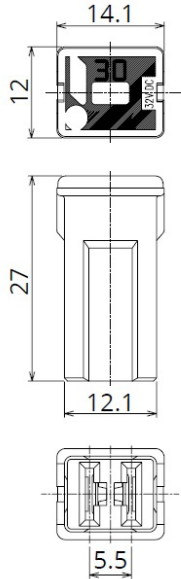


Unit of measure: mm

### Time-Current Characteristics

% of Amperage Rating	Operating Time	
	Min	Max
110	100hrs.	-
135	60sec.	1800sec.
200	5sec.	60sec.
350	0.2sec.	7sec.
600	0.04sec.	1sec.

\*The fuse characteristic may change depending on the conditions of use.

### Time Current Characteristics Chart

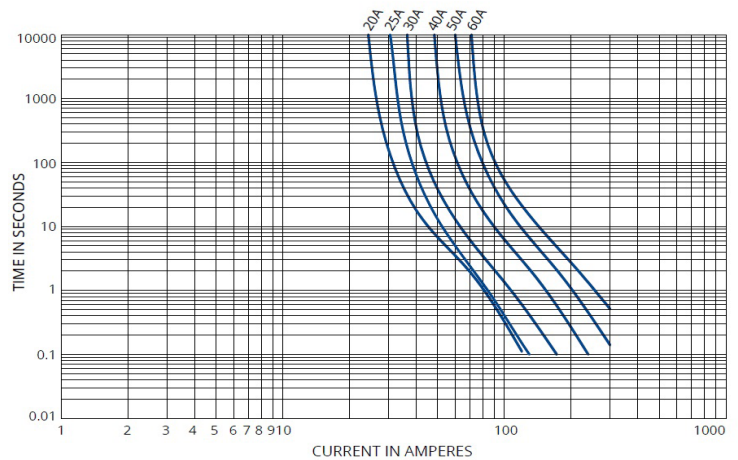

### Description

Part #	Amp	Resistance Value	Colours	Voltage Drop
9590-11	20	4.8mΩ	Light Blue	113 mV
9591-11	30	3.1mΩ	Pink	106 mV
9592-11	40	2.0mΩ	Green	92 mV
9593-11	50	1.7mΩ	Red	92 mV
9594-11	60	1.2mΩ	Yellow	93 mV

\*Voltage drop: apply 100% of the rated current.

### General Specifications

Rated Voltage: DC32V  
 Breaking Capacity: 1000A  
 Recommended Operating Temp.: -40°C ~ 120°C  
 Standard: ISO8820-4  
 Insertion Force: 44.1N  
 Pull-out Load: 9.8N~24.5N

