




4035U-4843U

Specifications Sheet

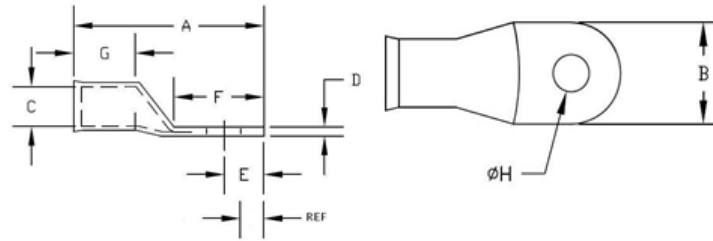


Part #	Cable Size	Description	Overall Length	Pad Width	Barrel ID	Pad Thickness	From Center Stud Hole to Tip	Tang Length	Barrel Length	Stud Hole Size	Reference
			+ / - .035"	+ / - .025"	+ / - .010"	+ / - .010"	+ / - .020"	Min	Min	+ / - .012"	+ / - .020"
			A	B	C	D	E	F	G	H	REF
4035U	8 Ga.	.445" Pad Width #10 Stud	1.200	0.445	0.186	0.070	0.235	0.550	0.400	0.212	0.129
4036U	8 Ga.	.445" Pad Width 1/4" Stud	1.200	0.445	0.186	0.070	0.235	0.550	0.400	0.276	0.097
4038U	8 Ga.	.605" Pad Width 5/16" Stud	1.305	0.605	0.186	0.070	0.315	0.690	0.400	0.338	0.146
4039U	8 Ga.	.605" Pad Width 3/8" Stud	1.305	0.605	0.186	0.070	0.315	0.690	0.400	.407 +/- .007	0.112
4043U	8 Ga.	.765" Pad Width 1/2" Stud	1.480	0.765	0.186	0.070	0.395	0.830	0.400	0.522	0.134
4135U	6 Ga.	.445" Pad Width #10 Stud	1.305	0.445	0.232	0.075	0.235	0.550	0.425	0.212	0.129
4136U	6 Ga.	.445" Pad Width 1/4" Stud	1.305	0.445	0.232	0.075	0.235	0.550	0.425	0.276	0.097
4138U	6 Ga.	.605" Pad Width 5/16" Stud	1.410	0.605	0.232	0.075	0.320	0.690	0.425	0.338	0.151
4139U	6 Ga.	.605" Pad Width 3/8" Stud	1.410	0.605	0.232	0.075	0.320	0.690	0.425	.407 +/- .007	0.117
4143U	6 Ga.	.765" Pad Width 1/2" Stud	1.550	0.765	0.232	0.075	0.395	0.830	0.425	0.522	0.134
4235U	4 Ga.	.525" Pad Width #10 Stud	1.500	0.525	0.286	0.080	0.275	0.650	0.475	0.212	0.169
4236U	4 Ga.	.525" Pad Width 1/4" Stud	1.500	0.525	0.286	0.080	0.275	0.650	0.475	0.276	0.137
4238U	4 Ga.	.525" Pad Width 5/16" Stud	1.500	0.525	0.286	0.080	0.275	0.650	0.475	0.338	0.106
4239U	4 Ga.	.625" Pad Width 3/8" Stud	1.530	0.625	0.286	0.080	0.325	0.695	0.475	.407 +/- .007	0.122
4243U	4 Ga.	.765" Pad Width 1/2" Stud	1.675	0.765	0.286	0.110	0.395	0.830	0.475	0.522	0.134
4336U	2 Ga.	.615" Pad Width 1/4" Stud	1.615	0.615	0.336	0.095	0.325	0.700	0.525	0.276	0.187
4338U	2 Ga.	.615" Pad Width 5/16" Stud	1.615	0.615	0.336	0.095	0.325	0.700	0.525	0.338	0.156
4339U	2 Ga.	.615" Pad Width 3/8" Stud	1.615	0.615	0.336	0.095	0.325	0.700	0.525	.407 +/- .007	0.122
4343U	2 Ga.	.755" Pad Width 1/2" Stud	1.750	0.755	0.336	0.110	0.395	0.830	0.525	0.522	0.134
4836U	1 Ga.	.655" Pad Width 1/4" Stud	1.720	0.655	0.360	0.100	0.330	0.710	0.575	0.276	0.192
4838U	1 Ga.	.655" Pad Width 5/16" Stud	1.720	0.655	0.360	0.100	0.330	0.710	0.575	0.338	0.161
4839U	1 Ga.	.655" Pad Width 3/8" Stud	1.720	0.655	0.360	0.100	0.330	0.710	0.575	.407 +/- .007	0.127
4843U	1 Ga.	.755" Pad Width 1/2" Stud	1.830	0.755	0.360	0.100	0.395	0.830	0.575	0.522	0.134



4035U-4843U

Specifications Sheet

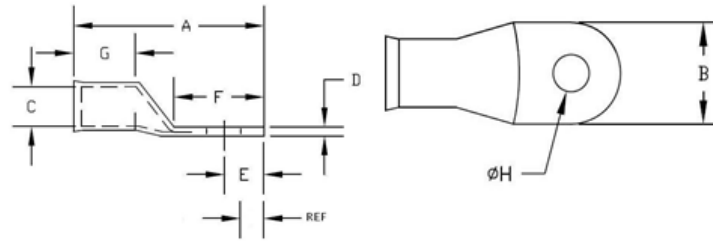

Part #	Cable Size	Description	Overall Length	Pad Width	Barrel ID	Pad Thickness	From Center Stud Hole to Tip	Tang Length	Barrel Length	Stud Hole Size	Reference
			+ / - .035"	+ / - .025"	+ / - .010"	+ / - .010"	+ / - .020"	Min	Min	+ / - .012"	+ / - .020"
			A	B	C	D	E	F	G	H	REF
4436U	1/0	.725" Pad Width 1/4" Stud	1.830	0.725	0.407	0.110	0.380	0.760	0.625	0.276	0.242
4438U	1/0	.725" Pad Width 5/16" Stud	1.830	0.725	0.407	0.110	0.380	0.760	0.625	0.338	0.211
4439U	1/0	.725" Pad Width 3/8" Stud	1.830	0.725	0.407	0.110	0.380	0.760	0.625	.407 +/- .007	0.177
4443U	1/0	.825" Pad Width 1/2" Stud	1.900	0.825	0.407	0.110	0.425	0.860	0.625	0.522	0.164
4536U	2/0	.815" Pad Width 1/4" Stud	2.060	0.815	0.461	0.110	0.425	0.900	0.650	0.276	0.287
4538U	2/0	.815" Pad Width 5/16" Stud	2.060	0.815	0.461	0.110	0.425	0.900	0.650	0.338	0.256
4539U	2/0	.815" Pad Width 3/8" Stud	2.060	0.815	0.461	0.110	0.425	0.900	0.650	.407 +/- .007	0.222
4543U	2/0	.815" Pad Width 1/2" Stud	2.060	0.815	0.461	0.110	0.425	0.900	0.650	0.522	0.164
4636U	3/0	.895" Pad Width 1/4" Stud	2.160	0.895	0.511	0.120	0.465	0.940	0.675	0.276	0.327
4638U	3/0	.895" Pad Width 5/16" Stud	2.160	0.895	0.511	0.120	0.465	0.940	0.675	0.338	0.296
4639U	3/0	.895" Pad Width 3/8" Stud	2.160	0.895	0.511	0.120	0.465	0.940	0.675	.407 +/- .007	0.262
4643U	3/0	.895" Pad Width 1/2" Stud	2.160	0.895	0.511	0.120	0.465	0.940	0.675	0.522	0.204
4736U	4/0	.590" Barrel ID 1/4" Stud	2.390	1.035	0.590	0.130	0.525	1.040	0.700	0.276	0.367
4738U	4/0	.590" Barrel ID 5/16" Stud	2.390	1.035	0.590	0.130	0.525	1.040	0.700	0.338	0.356
4739U	4/0	.590" Barrel ID 3/8" Stud	2.390	1.035	0.590	0.130	0.525	1.040	0.700	.407 +/- .007	0.322
4743U	4/0	.590" Barrel ID 1/2" Stud	2.390	1.035	0.590	0.130	0.525	1.040	0.700	0.522	0.264

1. Material: Annealed copper per ASTM B-152
2. Finish: Parts shall be free of burrs, sharp edges.
3. Identification: Gauge Size and certification marks will be stamped on the tang.
4. Dimensions: All dimensions are in inches unless otherwise specified.