




PICO®

5118 - 5124 Specifications Sheet

Outline Drawing

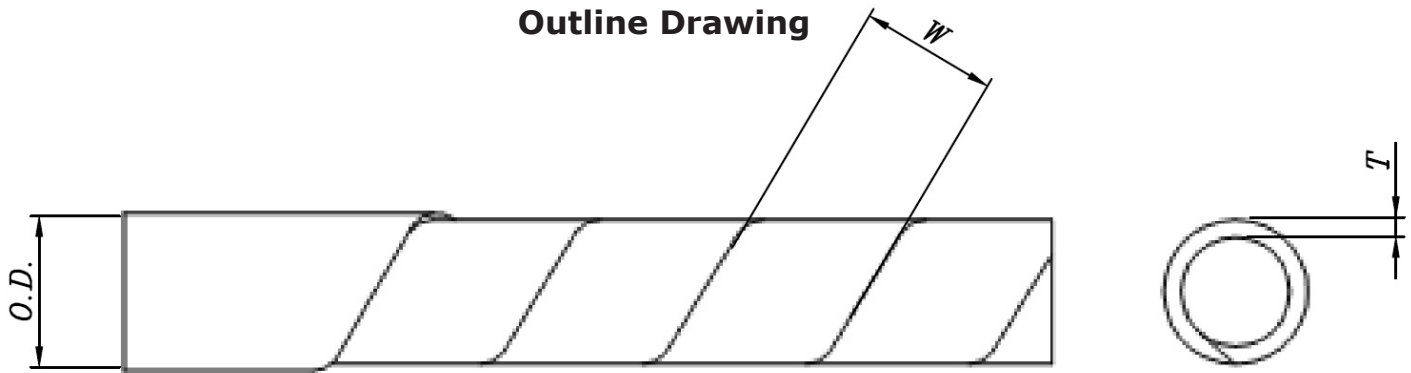

Part #	Nominal I.D.	W Width (mm)	T Wall Thickness (mm)
5118, 5118-0	1/8"	7.7 ± 1	0.5 ± 0.1
5120, 5120-0	1/4"	7.4 ± 1	0.6 ± 0.1
5121, 5121-0	3/8"	12.3 ± 1	0.8 ± 0.1
5122, 5122-0	1/2"	15.0 ± 1	0.85 ± 0.1
5123, 5123-0	3/4"	19.2 ± 1	1.2 ± 0.2
5124, 5124-0	1"	21.5 ± 1	1.3 ± 0.2

Notes

Performance Enhancers:

Flame Retardant	No
UV Inhibitor	No
Heat Stabilizer	No

Performance Characteristics:

Flexibility	Excellent
Abraison Resistance	Good
Chemical Resistance	Good
Continuous Operating Temp.	70°C Max
Vicat Softening Temperature	94°C

