





PICO®

5139 - 5148 Specifications Sheet

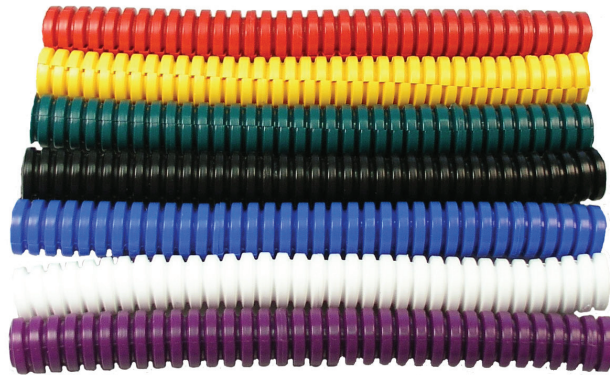

Part #	Nominal I.D.	A (I.D.)		B (O.D.)		C (Wall Min)
		Min	Max	Min	Max	
5140	1/4"	6.5	7.01	9.47	10.11	0.11
5141	3/8"	9.35	10.11	12.56	13.32	0.12
5142	1/2"	11.97	13.07	16.39	17.31	0.12
5139	5/8"	15.11	16.08	18.59	19.56	0.12
5143	3/4"	18.97	19.86	23.1	23.86	0.12
5145	7/8"	21.54	22.81	28.12	29.24	0.13
5144	1"	25.91	27.16	31.78	33.13	0.15
5146	1-1/4"	30.45	31.93	36.73	38.10	0.15
5147	1-1/2"	39.78	41.83	47.42	49.45	0.15
5148	2"	50.01	51.77	58.04	60.66	0.28

Outline Drawing

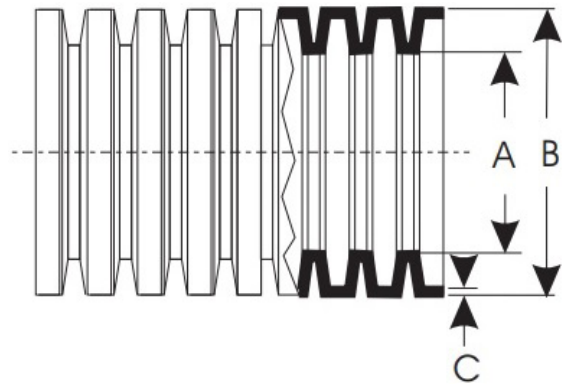

Notes

Performance Enhancers:

Flame Retardant	No
UV Inhibitor	No
Heat Stabilizer	No

Performance Characteristics:

Flexibility	Excellent
Abraison Resistance	Good
Chemical Resistance	Good
Continuous Operating Temp.	-40 to 85°C Min 3000 Hrs.
Short Term Operating Temp.	-40 to 93°C Min 168 Hrs.

