




PICO®

9420 Specifications Sheet

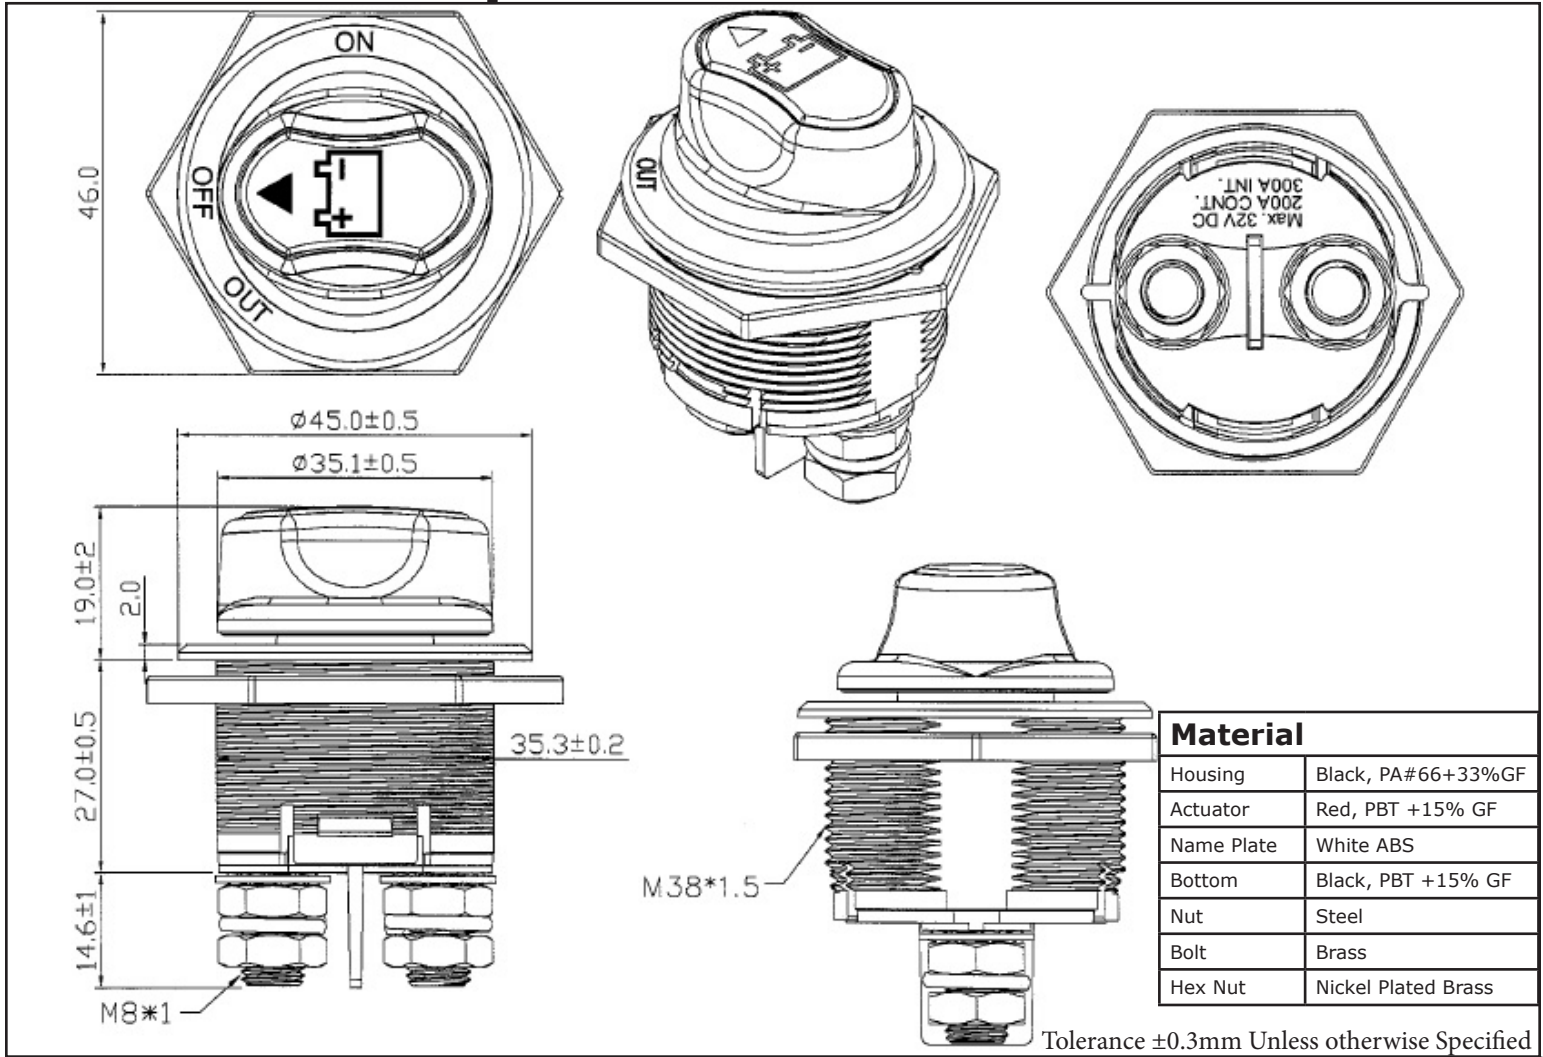

Specifications

Continuous Rating	200A 32VDC
Intermittent Rating	300 Amps
Cranking Rating	1000 Amps 5 seconds
Contact Resistance	50m ohm Max.
Insulation Resistance	DC 500V 100M ohm Min.
Dielectric Strength	AC 1000V 1 minute DC 2000V 1 minute
Switch Function	2p SPST OFF-ON
Operation Temperature	-30C to 60C

Circuitry



Mounting

