






PICO®

9429

Specifications Sheet


Outline Drawing

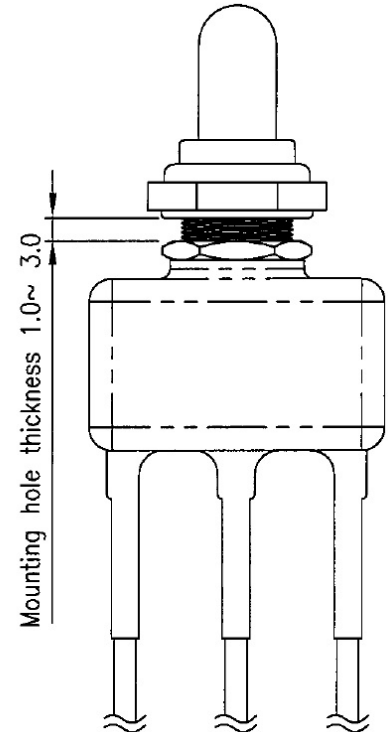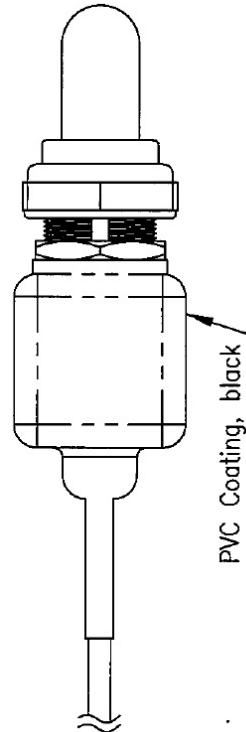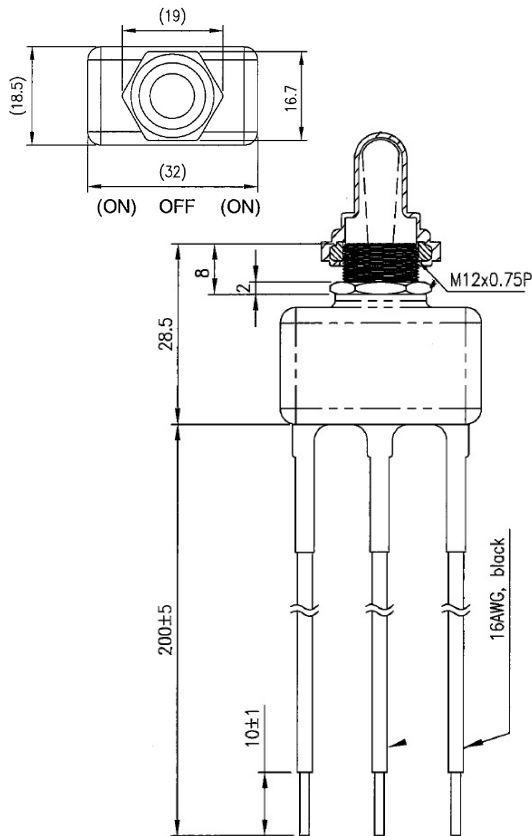


Unit of measurement: mm

Tolerances ± 0.3 Unless Otherwise Specified

Mounting Hole



Circuit Diagram

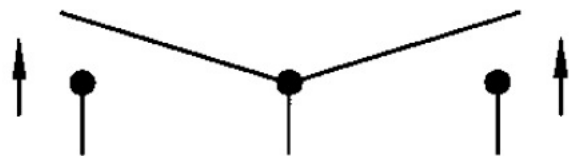

Specifications

Rating	25A 12V DC; 12A 24V DC
Contact Resistance	50m ohm Max
Insulation Resistance	DC 500V 100M ohm Min
Dielectric Strength	AC 1500V 1 minute
Operation Temperature	0°C ~ 65°C
Switch Function	3P SPDT (ON)-OFF-(ON)

Notes

- PVC Coated Body
- Contains: 1 HEX Nut & 1 Rubber Boot
- HEX Nut & Rubber boot installed on switch