




PICO®

9469 Specifications Sheet

Outline Drawing

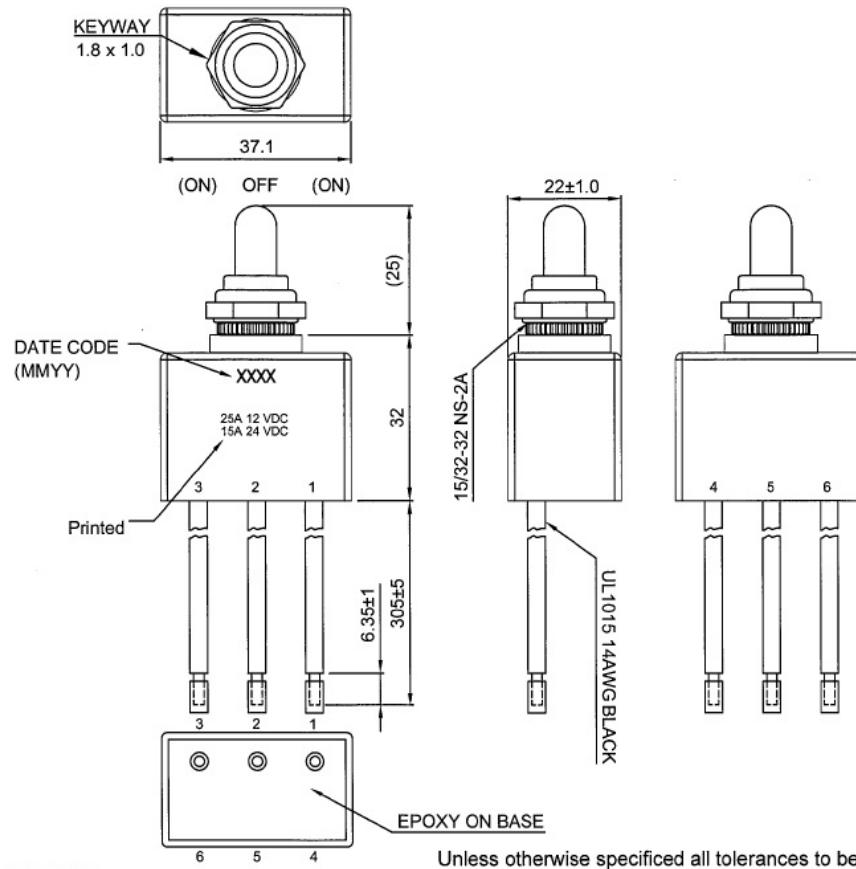


Materials

- Frame: PBT + 15% GF Black
- Toggle: Zinc, Nickel Plated
- Bushing: Brass, Nickel Plated
- Knurl Nut: Zinc, Nickel Plated
- Internal O-ring
- Water proof Cover: Rubber, black
- Dust proof

Specifications

Rating	25A 12VDC 15A 24VDC
Contact Resistance	50m ohm Max.
Insulation Resistance	DC 500V 100M ohm Min.
Dielectric Strength	AC 1500V 1 minute
Operation Temperature	-40° to 85°
Switch Function	3P SPDT (ON)-OFF-(ON)

Mounting Hole



Circuit Diagram

