

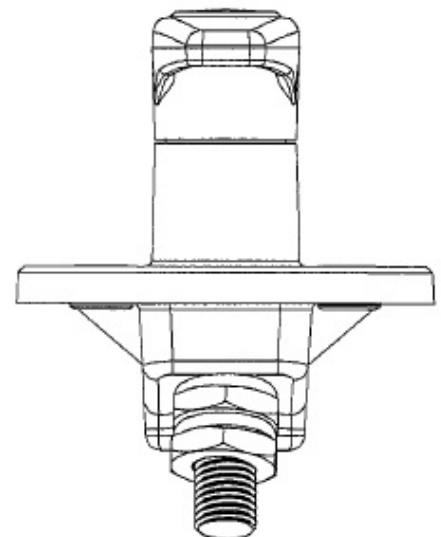
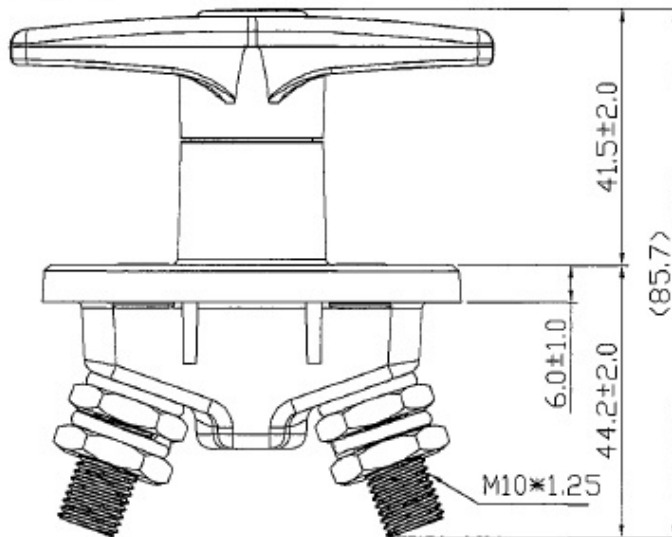


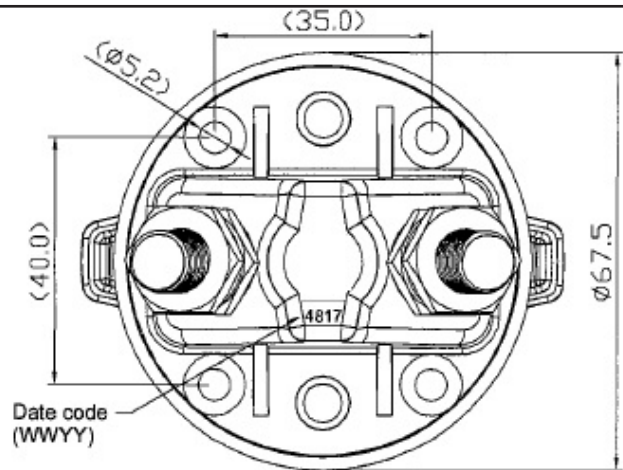

PICO®

9481 Specifications Sheet

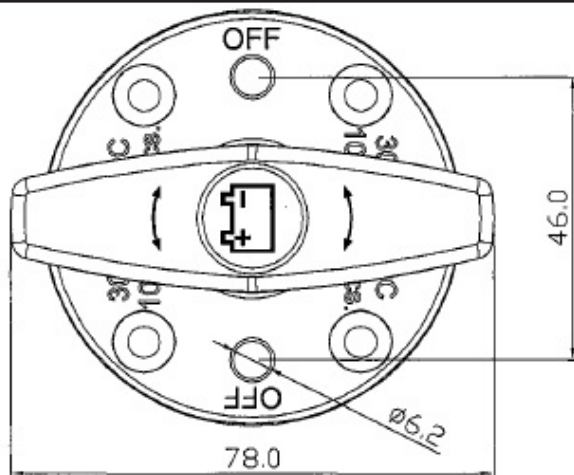

Tolerance $\pm 0.5\text{mm}$ Unless otherwise Specified

Specifications

Continuous Rating	300A 32VDC
Intermittent Rating	450 Amps
Cranking Rating	1000 Amps 10 seconds
Contact Resistance	50m ohm Max.
Insulation Resistance	DC 500V 100M ohm Min.
Dielectric Strength	AC 1000V 1 minute DC 2000V 1 minute
Switch Function	2p SPST OFF-ON
Operation Temperature	-30C to 60C

Circuitry

ON



OFF



Material

Housing	Black, PBT +15% GF
Actuator	Red, PBT +15% GF
Bottom	Black, PBT +15% GF
Bolt	Copper
Hex Nut	Nickel Plated Brass

*Actuator can be taken out
*IP 67 Rated for panel seal