



PICO®




5340-5342 Specifications Sheet



Heavy wall cross-linked polyolefin tubing
Heavy wall heat shrink tubing provides maximum reliability for insulating and protecting cable joints and terminations.

Outline Drawings

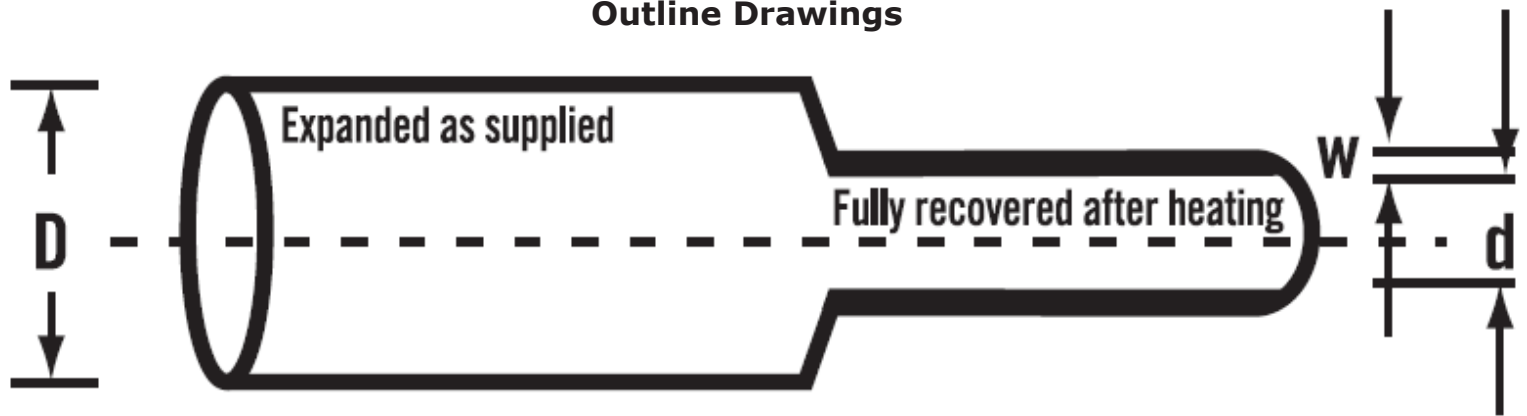

Features & Benefits

- 3:1 Shrink Ratio
- Withstands severe mechanical requirements of U.R.D., submersible and direct burial installations.
- High impact, abrasion, corrosion and chemical resistance.
- Rated for 1 Kv, 90°C continuous use.
- Thermoplastic adhesive liner provides complete environmental protection and insulation.
- Continuous operating temperature: -55°C to 110°C
- Shrink Temperature: 120°C

Standards

- UL486D
- CSA C22.2 No. 198.2
- ANSI C119- 1
- Western Underground Guide Numbers 2.4 and 2.5
- ICEA and NEMA insulation thickness requirements.
- DNV type approved

Typical Applications

- Electrical/ Utility
- Industrial
- Strain relief
- Insulation of primary low voltage cables.

Installation

- PICO of Canada Ltd. offers a comprehensive selection of advanced shrink appliances that ensure process stability and repeatability.
- Minimum Recovery Temperature: 120°C
- Adhesive activation temperature: 110°C

Dimensions

Part #	Expanded		Recovered			
	Internal Diameter (MIN)D		Internal Diameter (MAX)d		Total Wall Thickness (NOM.)w	
	MM	IN	MM	IN	MM	IN
5340	13.0	0.51	4.1	0.16	2.0	0.08
5341	19.1	0.75	6.1	0.24	3.0	0.12
5342	27.9	1.10	8.9	0.35	2.0	0.12