




PICO[®]

7066, 7066-0, 7067, 7067-0, 7068, 7068-0 Specifications Sheet

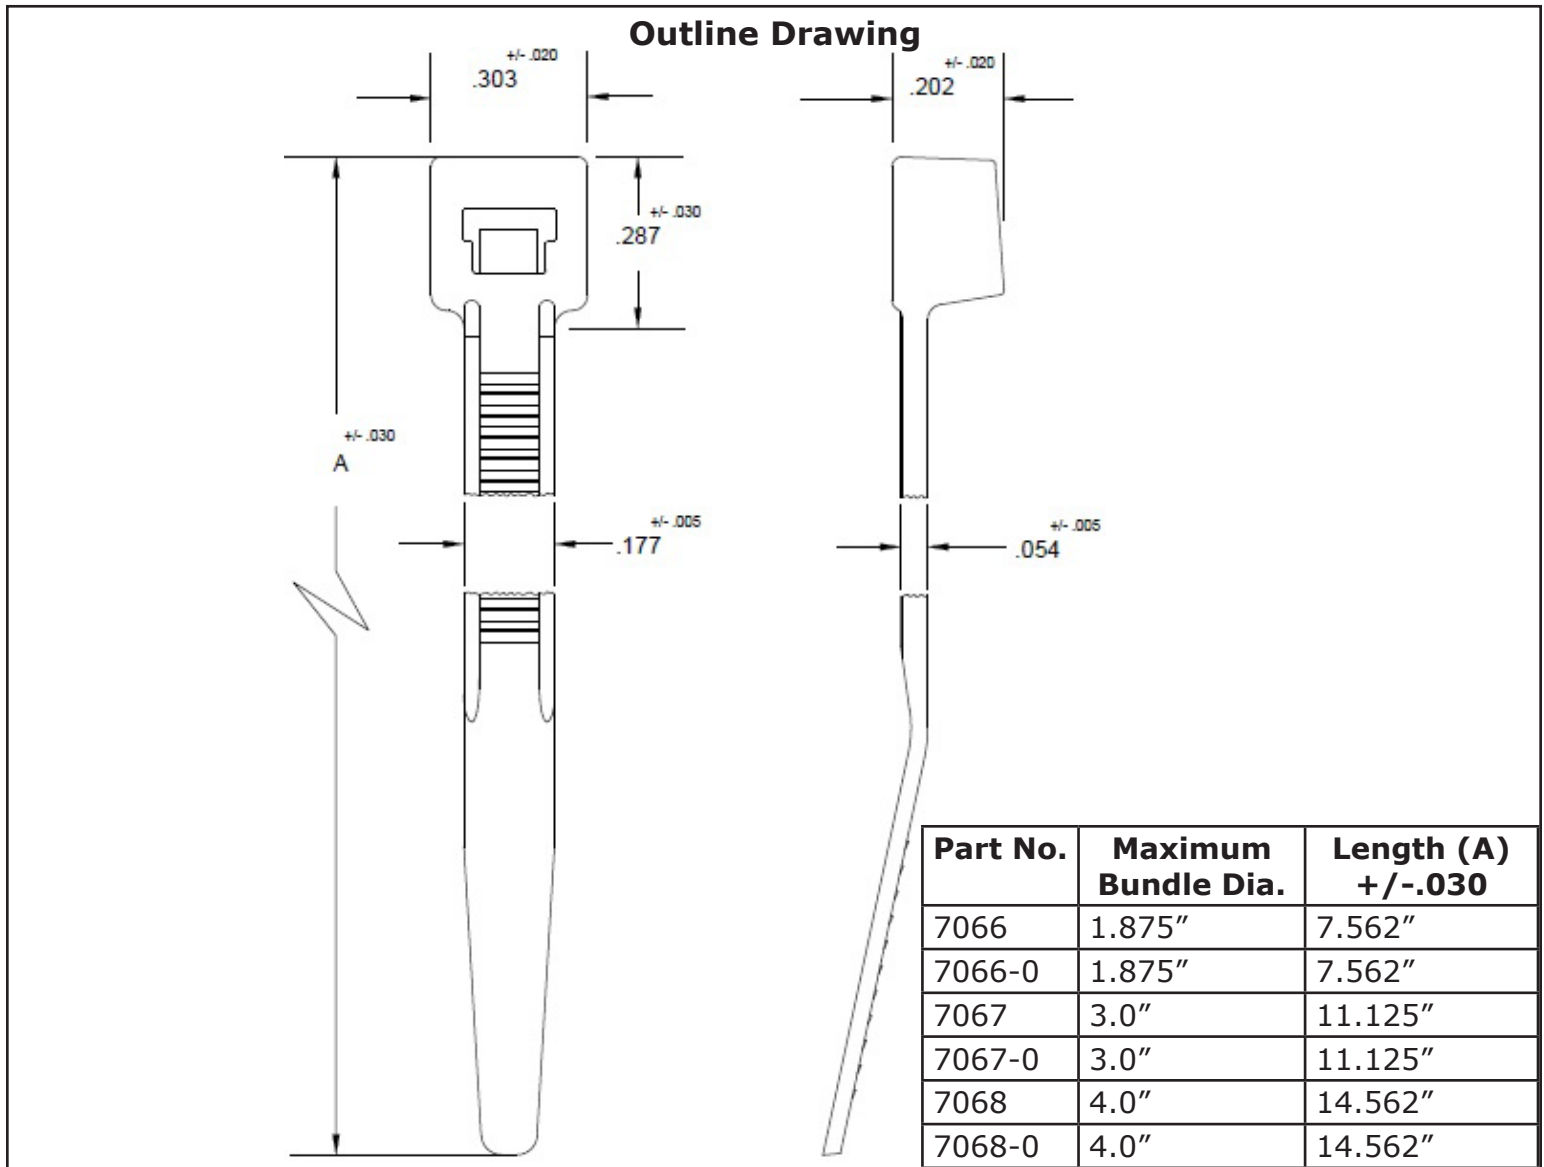

Notes

- Material: Nylon 6/6
- Flammability Rating: UL94V-2
- Maximum Operating Temperature: 85°C (185°F)
- Minimum Tensile Rating: 50Lbs
- Standard: UL 62275 Type 2/21
- Minimum Installation Temperature -20°C (4°F)