




# PICO®

## 3405 Specifications Sheet

Outline Drawing

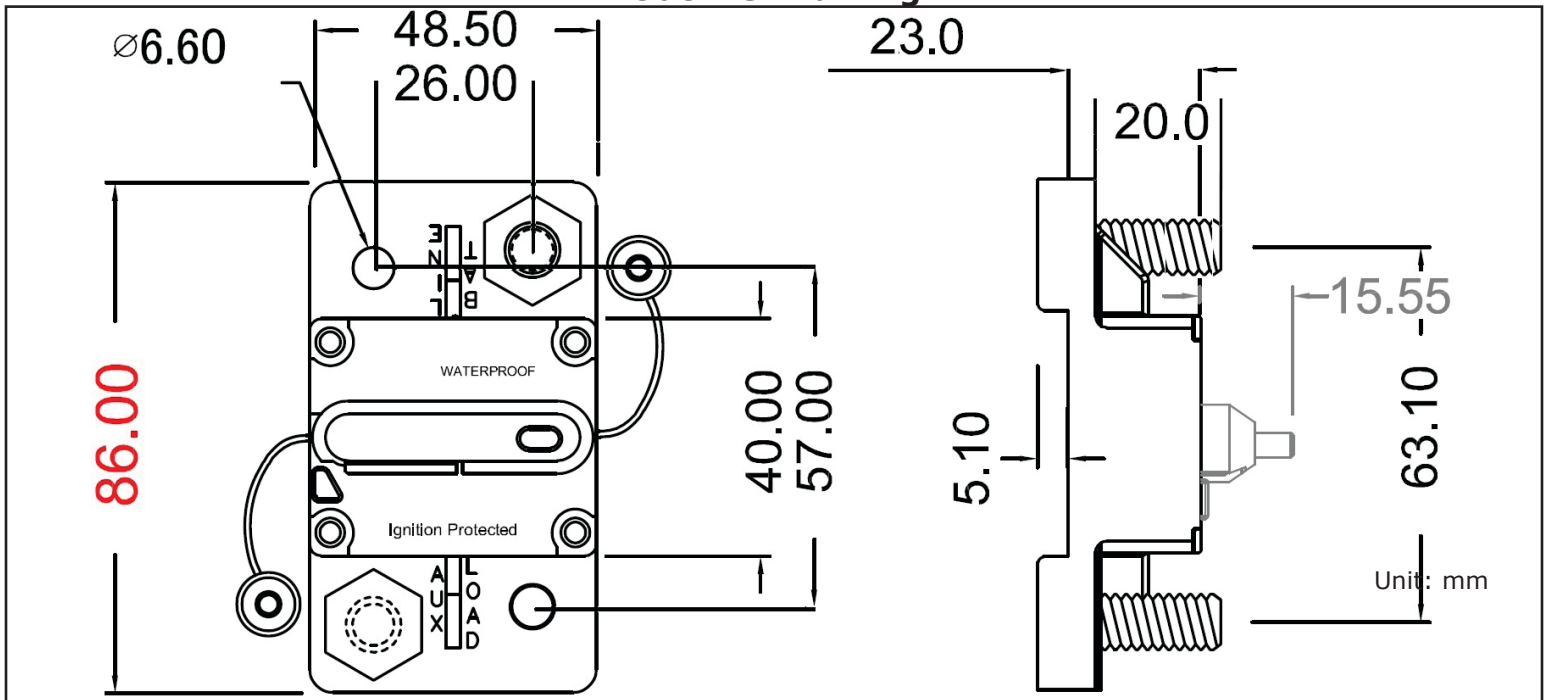

**Part#**

**Amperage**

3405

200A


3406

250A


3407

300A

TEMPERATURE DERATING CURVES

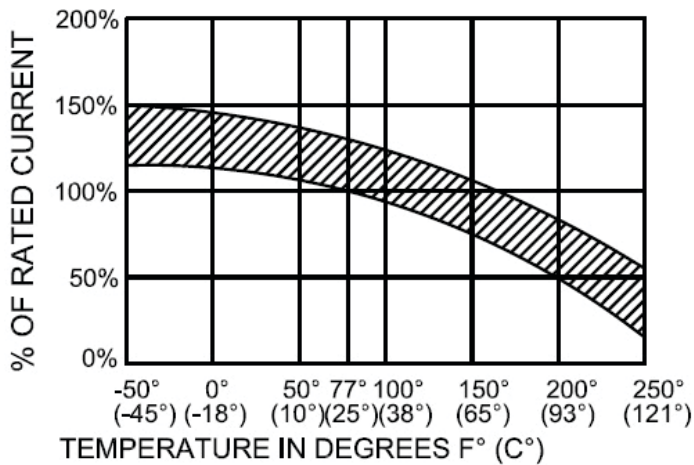

TIME VS. PERCENT OF RATED CURRENT

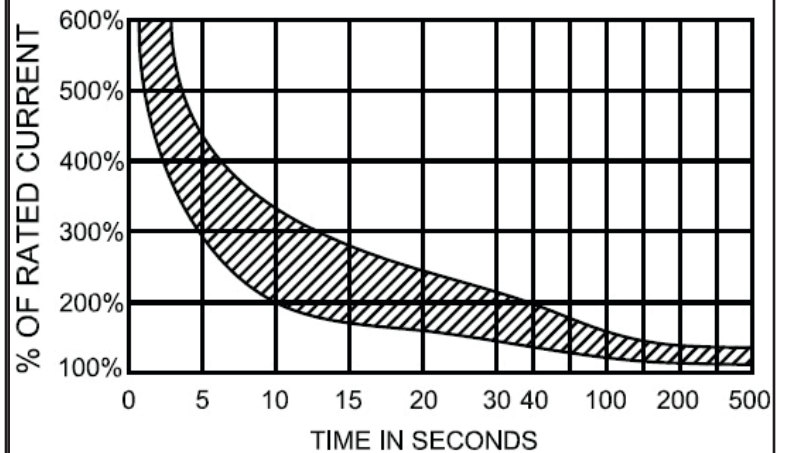



# PICO®

## 3405 - 3407 Specifications Sheet



### Endurance & Interrupt Capacity

	Endurance			Interrupt
	Current	Cycles	Time	
96VDC	≤50A	2x	>100	1KA-96VDC
	≤60A	2X	>50	
72VDC	≤150A	2X	>100	2KA-72VDC
48VDC	≤100A	4X	>100	2KA-48VDC
	≤150A	2X	>100	3KA-32VDC
28VDC	≥200A	2X	>100	1.5KA-28VDC
14VDC		4X	>200	2.5KA-14VDC
		≤150A	4X	>6000

### Notes

- Housing Material: UL 94V0 rated thermal plastic.
- IP 67 Rated
- Operating Temperature Range: -32°C to 82°C
- Storing Temperature: -34°C to 149°C
- Stud size: 5/16"
- Torque rating: 150in-lbs (17Nm)
- Meets: SAE J1428, J1625, J553, J1171, UL 1500
- 135% rated current blows within 1800 seconds
- 200% rated current blows within 60 seconds