




14 AWG 20A Bayonet Type Glass Fuse Holder Specifications Sheet

OUTLINE DRAWING

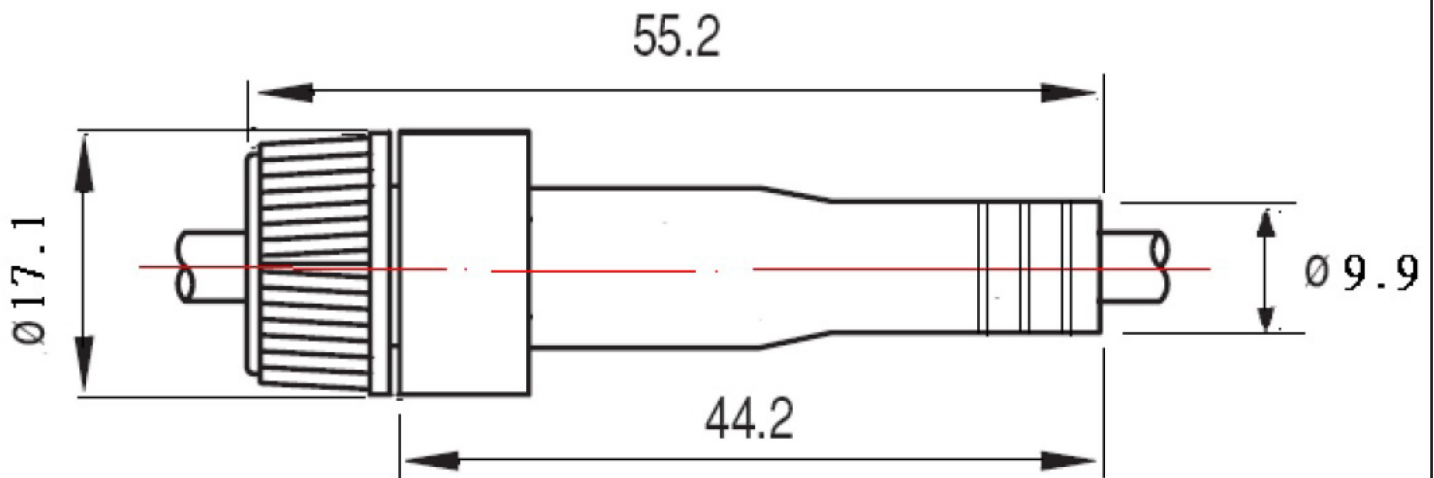

NOTES

Current Rating	20A Max
Voltage	125/250V AC, 50V DC or less
Insulation Resistance	@ 500V DC: 100M Ω Min.
Contact Resistance	5m Ω @ 1A DC
Dielectric Strength for 60 Seconds	AC 2000V Min.
Material	Cover P.C. , Bottom: Bakelite
Wire	UL1015, 14 AWG, Red, Length: 12"
Applicable Fuse	AGC, JSO
Ambient Temperature	-23°C to 80°C

