




PICO®

PART # 1956

12-10 AWG .250 Vinyl Male Quick Connectors Specifications Sheet

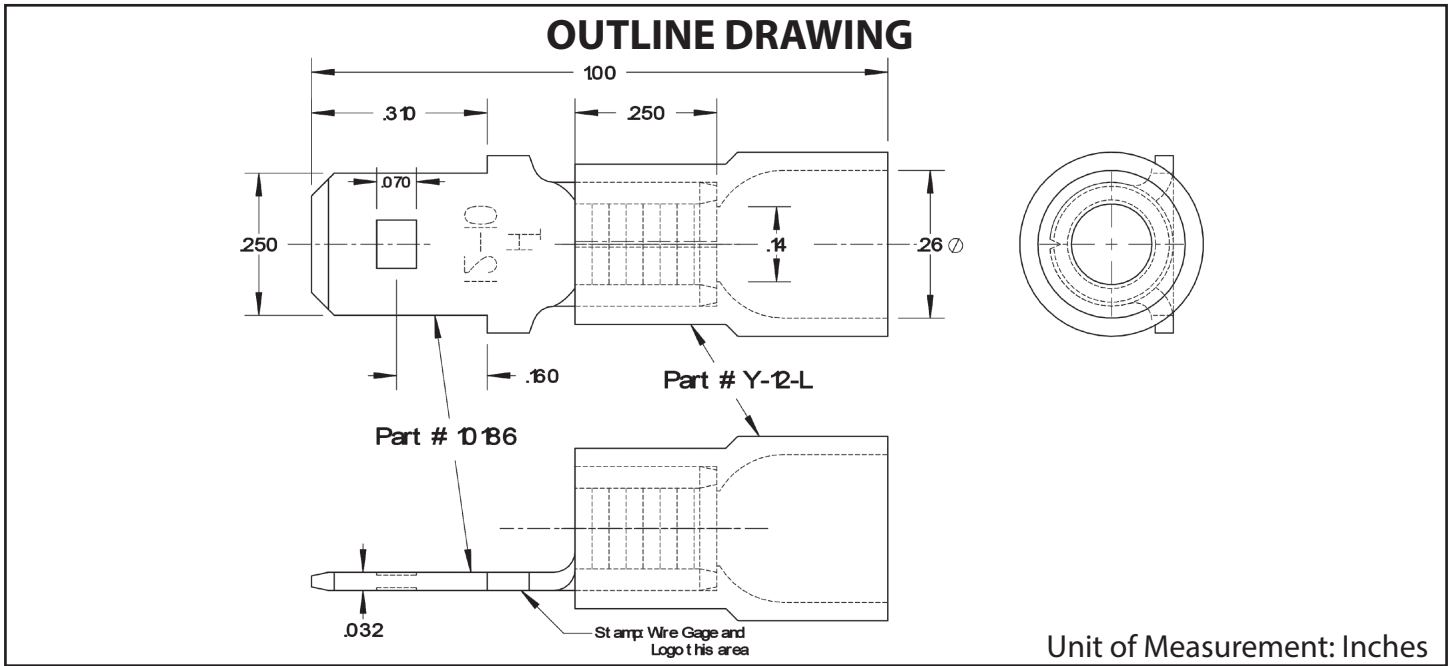

NOTES

PART #	GENDER	WIDTH	LENGTH	BARREL LENGTH
1956	Male	.250	1.00	.250

UL REQUIREMENTS:

- Temperature Rating: 75°C Max. 600V
- One Crimp Required
- Solid or Stranded Wire
- Crimp Tool: PICO no. 401/403 Crimp Tool Body with 415 Crimp Die
- 110 Copper Alloy 1/2 Hard Temper
- ASTM Spec B152
- Flash Electro Tin Plate ASTM Spec B545
- Heat Treatment: Anneal to Soft Temper
- Military Specs: Mil-T-10727C Type 1.0007-.00025 Thick
- Flame Rating: UL94 V-0

INSULATOR NOTES:

- Material: PVC
- Colour: Yellow

WARNING! Incorrect installation of electrical wire and terminals can be hazardous. It can cause an injury or property damage. Refer to National Electrical Code or take advice from the local building inspector for safe wiring practices. To determine the correct wire and terminal size to use and to ensure it will be safely installed, seek guidance from a licensed electrical contractor or engineer.

These are recommendations of procedures by PICO. Use the product after determining it's suitability for the application. PICO is not responsible for any risks and liability for use. Statements related to any PICO products which are not present in PICO of Canada Ltd's recent publications have no validation unless they are authorized by a PICO representative in writing.

