




PICO®

**PART # 7247, 7247-6
7248, 7248-6
7249, 7249-6**

Metal Pawl Cable Tie 18lbs Specifications Sheet

OUTLINE DRAWING

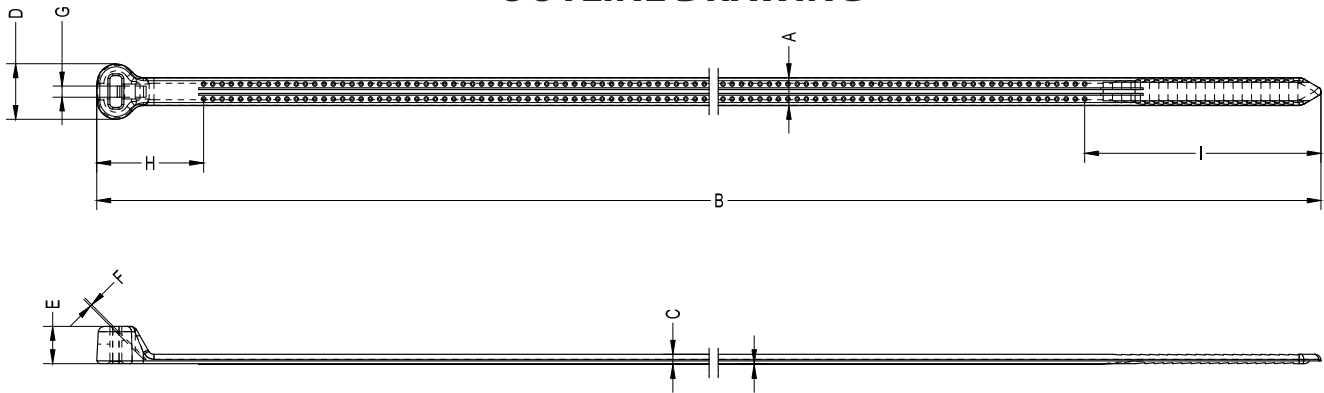

Unit of Measure: mm

NOTES

Part #	Colour	A	B	C	D	E	F	G	H	I	J	Bundle Diameter	
												Min	Max
7247	UV Black	3	100	1.1	5.9	4.0	0.2	1.2	11.5	25.5	0.1	3	20.5
7247-6	Natural	3	100	1.1	5.9	4.0	0.2	1.2	11.5	25.5	0.1	3	20.5
7248	UV Black	3	160	1.1	5.9	4.0	0.2	1.2	11.5	25.5	0.1	3	39.8
7248-6	Natural	3	160	1.1	5.9	4.0	0.2	1.2	11.5	25.5	0.1	3	39.8
7249	UV Black	3	200	1.1	5.9	4.0	0.2	1.2	11.5	25.5	0.1	3	52.5
7249-6	Natural	3	200	1.1	5.9	4.0	0.2	1.2	11.5	25.5	0.1	3	52.5

Material (UV Black)	Polyamide 6.6 natural+ ~1% carbon black
Material (Natural)	Polyamide 6.6 natural
Flammability Rating	UL 94 - V2
Humidity Absorption	2.7% - 2.8% (23°C - 50% R.H.)
Installation Temperature	-20°C to 85°C
Working Temperature	-60°C to 85°C
Max Sustainable Temperature Short Term	110°C
Good Resistance	Bases, Oils, Grease, Oil Derivatives, Chloride Solvents
Limited Resistance	Acid
No Resistance	Phenols
UL Standard	Type 21

