


9V to 48V DC Led Digital Hourmeter Specifications Sheet

OUTLINE DRAWING

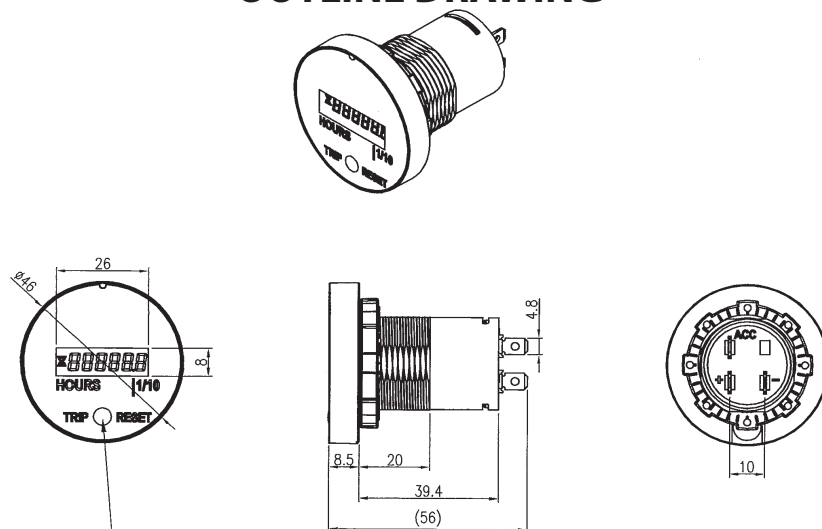

TRIP / RESET SWITCH:
Power ON + ACC ON (LCD Display TOTAL journey hours):
1.Short press the switch: LCD Display single journey hours
2.Press the switch 2 sec: Clear single journey hours to 0.0

Unit of Measure: mm

NOTES

Operating Voltage	9-48V DC
Hour Meter Capacity	99,999 hours
Battery Meter Resolution	10% per LED light
Hour Meter Resolution	0.1 H/1H
Insulation Resistance	500V DC 100M Ω Min.
Operating Temperature	-20°C to 60°C
Operating Current	20mA
Works on: Lead-Acid Battery and Li-ion Battery (exclude Trojan Battery & EZGO). LCD display	

MOUNTING HOLE

