


# 0 to 20A LED Digital Ampmeter Specifications Sheet

## OUTLINE DRAWING

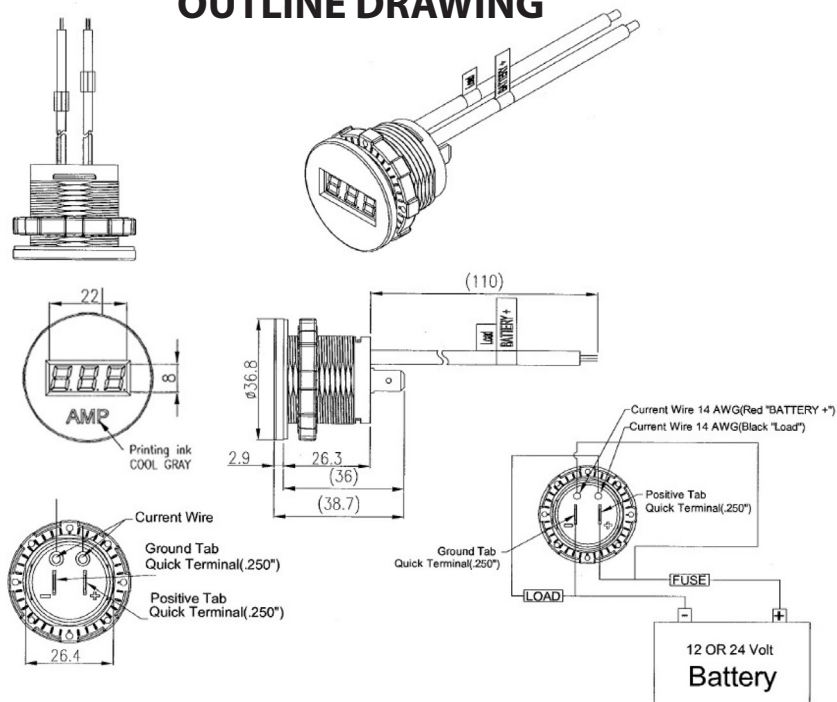

## NOTES

|                                        |                                                  |
|----------------------------------------|--------------------------------------------------|
| <b>Operating Voltage</b>               | 7-33V DC                                         |
| <b>Current Tolerance</b>               | 5% 1A $\pm$ 0.1A, 10A $\pm$ 0.5A, 20A $\pm$ 1.0A |
| <b>Measuring Current Range</b>         | 0.0-20A                                          |
| <b>Insulation Resistance</b>           | 500V DC 100M $\Omega$ Min.                       |
| <b>Operating Temperature</b>           | -20°C / - 50°C                                   |
| <b>Reverse Polarity Protection</b>     |                                                  |
| <b>Surge Protection up to 400W/35V</b> |                                                  |

## MOUNTING HOLE

